



**New Built-In Model BI-36R  
All Refrigerator**

In a dual installation with all freezer Model BI-36F, the all refrigerator Model BI-36R offers maximum refrigeration capacity. The new air purification system continuously scrubs odors, bacteria, ethylene gas and contaminants to keep food fresh. Framed, overlay/flush inset and stainless steel models are available. A new flush inset installation option allows the unit to sit flush with surrounding cabinetry. Model BI-36R/S is Energy Star qualified.



*Stainless steel Models BI-36R and BI-36F shown with tubular handles.*

**Features**

- Framed, overlay/flush inset and stainless steel design applications
- Flush inset installation option allows unit to sit flush with surrounding cabinetry
- Air purification system
- Model BI-36R/S is Energy Star qualified with \$43 annual energy usage
- Flip-up grille for easy access to condenser
- Adjustable, spill-proof glass shelves
- Door shelves are adjustable in one-inch increments
- Crisper and deli drawers form a special low-temperature zone
- Informational freshness cards inside unit

| Model Options | BI-36R/F    | BI-36R/O            | BI-36R/S/TH | BI-36R/S/PH | BI-36R/S/CH |
|---------------|-------------|---------------------|-------------|-------------|-------------|
| <b>Design</b> | Framed      | Overlay/Flush Inset | Stainless   | Stainless   | Stainless   |
| <b>Grille</b> | Louvered    | Panel               | Stainless   | Stainless   | Stainless   |
| <b>Handle</b> | Full-Length | *                   | Tubular     | Pro         | Curved      |

*\*Handle not included to allow for design flexibility.*

**Interior Features**


- **Refrigerator**
  - 23.3 cu ft Capacity
  - Air Purification System
  - 4 Adjustable Glass Shelves
  - 1 Stationary Glass Shelf
  - 1 High-Humidity Drawer with Dividers
  - 2 Storage Drawers with Dividers
  - 3 Adjustable Door Shelves
  - 2 Stationary Door Shelves
  - Adjustable Dairy Compartment

**Accessories**

- Louvered, panel and stainless steel grilles for 83", 84" and 88" finished heights
- Stainless steel front panels for framed, flush inset and dual flush inset applications with stainless steel finish and handle options
- Side panels in classic stainless steel and white
- Stainless steel tubular, pro or curved handles and full-length extended handles
- Dozen egg container with lid
- Dual installation kit
- 90° door stop kit



This appliance is certified by Star-K to meet strict religious regulations in conjunction with specific instructions found on [www.star-k.org](http://www.star-k.org).



Flip-Up Grille



Air Purification System




Accessories are available through your Sub-Zero dealer. To obtain local dealer information, visit the Showroom Locator section of our website, [subzero.com](http://subzero.com).



## Built-In Model BI-36R


### Overall Dimensions

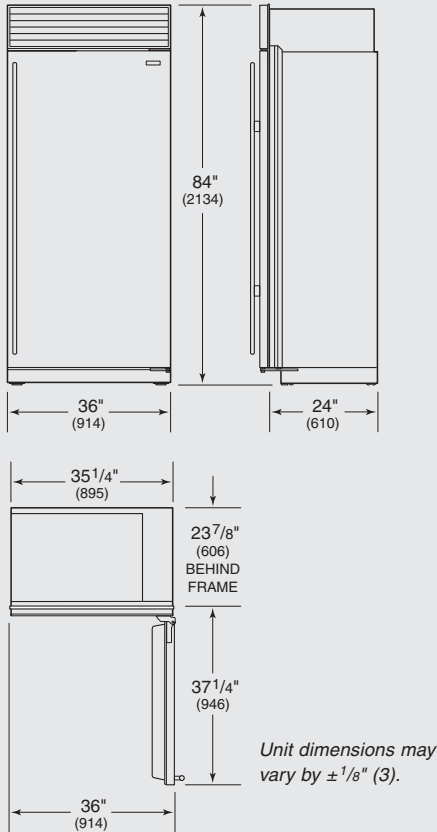

### Installation Specifications

#### Standard Installation

Dimensions in parentheses are in millimeters unless otherwise specified.

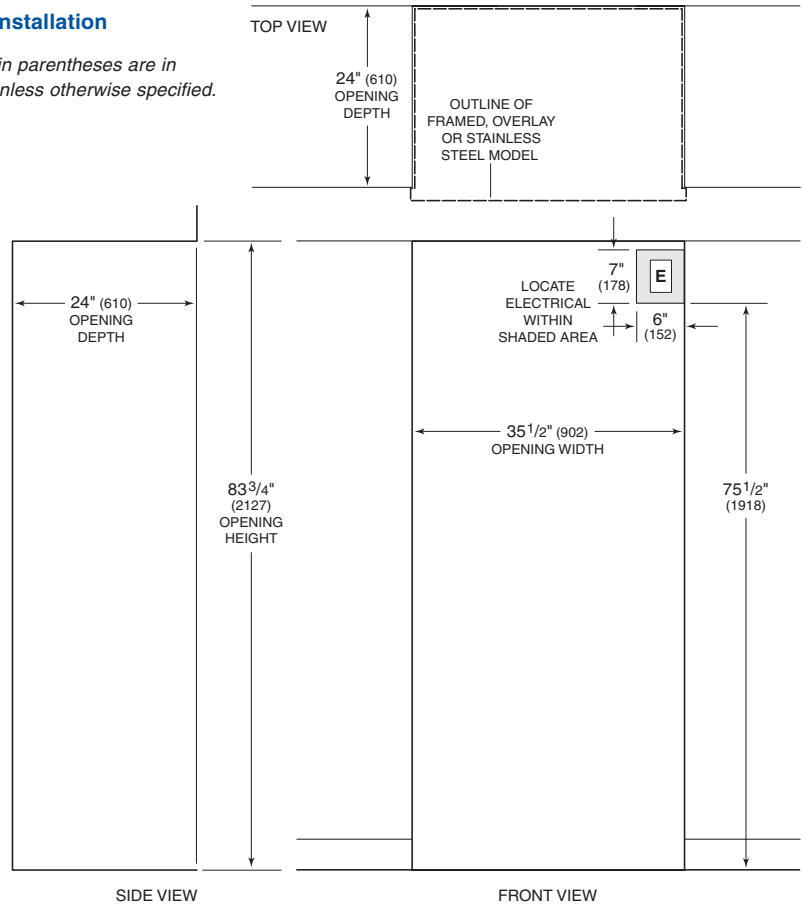

### Specifications

|                         |   |
|-------------------------|---|
| Overall Dimensions      | 36"W x 84"H x 24"D  |
| Door Clearance          | Standard 37 <sup>1</sup> / <sub>4</sub> "<br>Flush Inset 37 <sup>3</sup> / <sub>4</sub> " |
| Opening Width           | 35 <sup>1</sup> / <sub>2</sub> "  |
| Flush Inset Width       | 38"   |
| Opening Height          | 83 <sup>3</sup> / <sub>4</sub> "  |
| Flush Inset Height      | 84"   |
| Opening Depth           | 24"   |
| Flush Inset Depth       | 26 <sup>3</sup> / <sub>16</sub> "   |
| Electrical Requirements | 115 V AC, 60 Hz<br>15 amp circuit   |
| Shipping Weight         | 391–420 lbs   |

### Installation Notes

Built-In models may be used in a standard installation or in a flush inset installation which allows the unit to be flush with surrounding cabinetry.

Built-In all refrigerator and all freezer models with opposite hinges can be used in a dual installation.

Complete installation specifications, including panel sizes, can be found on our website, [subzero.com](http://subzero.com).

#### Flush Inset Installation

\*Dimensions based on 3/4" (19) panels.

