



36" (914) Gas Cooktop

MODEL CT36G

FEATURES

- ▶ Available in natural and LP gas
- ▶ Stainless steel top construction, available in classic and platinum stainless steel finishes
- ▶ Five automatic electronic re-ignition dual stacked sealed burners
- ▶ One large 15,000 Btu/hr (4.4 kWh) sealed burner with 700 Btu/hr (.2 kWh) delivered at simmer
- ▶ One medium 12,000 Btu/hr (3.5 kWh) sealed burner with 700 Btu/hr (.2 kWh) delivered at simmer
- ▶ Three small 9,200 Btu/hr (2.7 kWh) sealed burners with 300 Btu/hr (.1 kWh) delivered at simmer
- ▶ Illuminated control panel with two-tiered control knobs
- ▶ True Simmer setting on all burners
- ▶ Individual spark ignition system
- ▶ Low profile cast iron continuous burner grates with matte porcelain finish
- ▶ Seamless drawn burner pan
- ▶ Certified by Star-K to meet religious regulations
- ▶ CSA certified for US and Canada
- ▶ Two and five year residential warranty - exclusions apply, see warranty at the end of this guide


OVERALL DIMENSIONS ▼

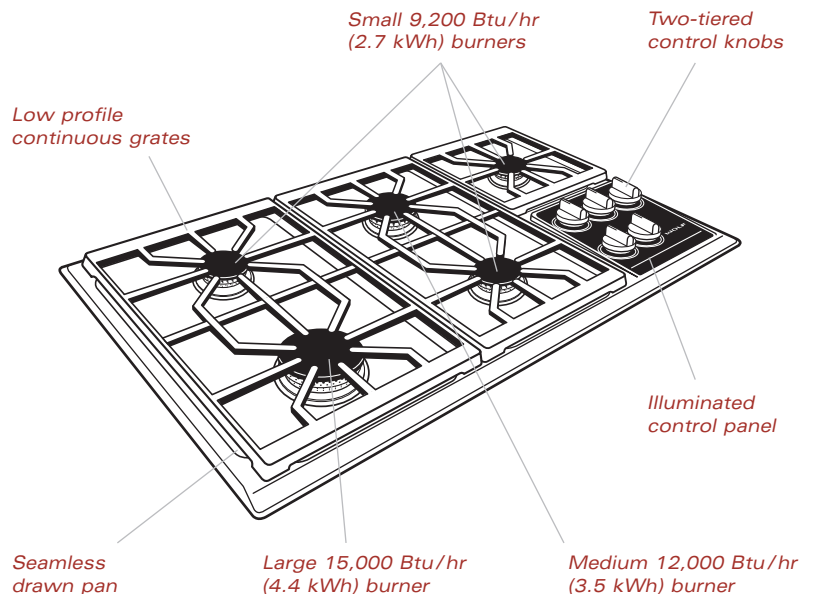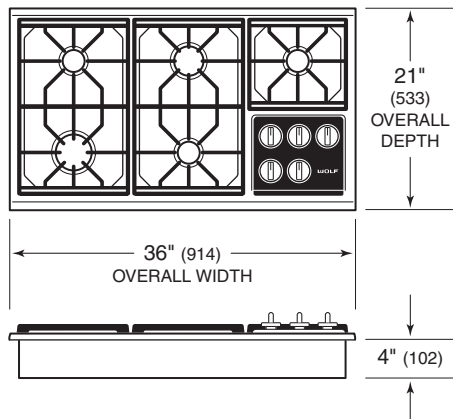

- ▶ Dimensions may vary by $\pm 1/8"$ (3).
- ▶ Dimensions in parentheses are in millimeters unless otherwise specified.

36" (914) Gas Cooktop

MODEL CT36G



Model CT36G

TRIM FINISH

- ▶ Classic Stainless Steel CT36G/S
- ▶ Platinum Stainless Steel CT36G/P

VENTILATION OPTIONS

- ▶ Chimney Wall or Island Hood
- ▶ Downdraft Ventilation System
- ▶ Pro Series Wall or Island Hood

Refer to the Wolf Cooktop Ventilation or Pro Series Ventilation sections for additional information.

ACCESSORIES

- ▶ Set on griddle
- ▶ Wok grate or single burner grate
- ▶ Filler strip
- ▶ LP and natural gas conversion kits
- ▶ High altitude conversion kit

Contact your Wolf dealer for additional information on accessories.

SPECIFICATIONS


Overall Cooktop Width	36" (914)
Overall Cooktop Height	4" (102)
Overall Cooktop Depth	21" (533)
Cooktop Cut-out Width	35" (889)
Cooktop Cut-out Depth	19 1/4" (489)
Minimum Cabinet Depth	22 3/4" (578)
Surface Burner Rating	One 15,000 Btu/hr (4.4 kWh) burner with 700 Btu/hr (.2 kWh) delivered at simmer One 12,000 Btu/hr (3.5 kWh) burner with 700 Btu/hr (.2 kWh) delivered at simmer Three 9,200 Btu/hr (2.7 kWh) burners with 300 Btu/hr (.1 kWh) delivered at simmer
Gas Rating	51,600 Btu/hr
Electrical Supply Requirements	120 V AC, 60 Hz, 15 amp dedicated circuit
Power Cord	6' (1.8 m) power cord with 3-prong grounded plug
Shipping Weight	67 lbs (30 kg)
Special Note	Cooktop can be installed above a Wolf 36" (914) built-in oven

- ▶ Specifications are subject to change without notice.

▶ Dimensions in parentheses are in millimeters unless otherwise specified.


36" (914) Gas Cooktop

INSTALLATION

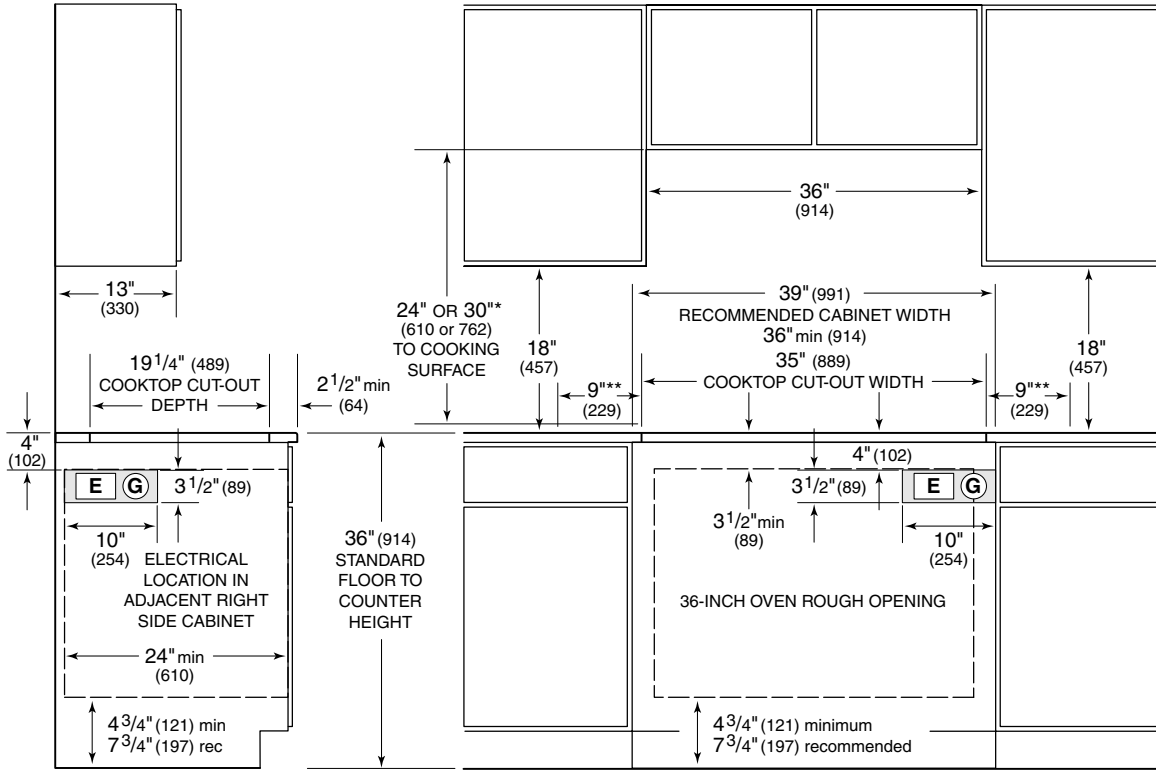

* Minimum 24" (610) from protected cabinet or 30" (762) from unprotected cabinet to cooking surface.
 ** Minimum clearance from side edge of cooktop cut-out to combustible surface up to 18" (457) above cooking surface.

► Dimensions may vary by ± 1/8" (3).

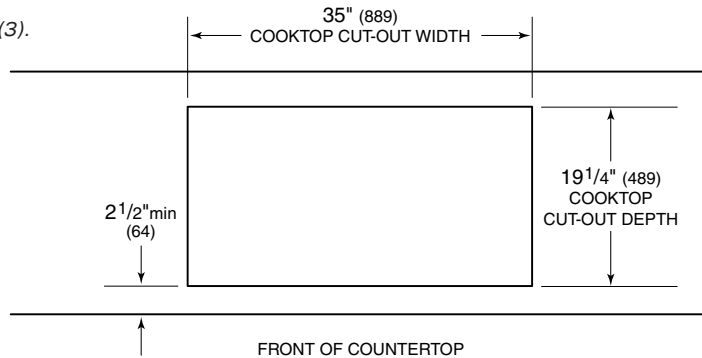

DIMENSIONS

Cooktop Cut-Out Width	35" (889)
Recommended Cabinet Width	39" (991)
Cooktop Cut-Out Depth	19 1/4" (489)
Location of Electrical and Gas Supply	Within shaded area

- See Installation Instructions shipped with unit for detailed specifications.
- Dimensions in parentheses are in millimeters unless otherwise specified.

36" (914) Gas Cooktop

INSTALLATION

INSTALLATION NOTES

- ▶ Wolf recommends using 39" (991) cabinets with the 36" (914) cooktop.
- ▶ A Wolf single 36" (914) built-in oven may be installed below this cooktop. Refer to the illustration for specifics on cut-out dimensions and placement of gas and electrical. Be aware of the depth of the cooktop when planning for this installation.
- ▶ Wolf gas cooktops are designed and agency approved for installation with Wolf built-in ovens only. The cooktop nominal width must match the built-in oven nominal width.
- ▶ The bottom cabinet support must be able to support 250 lbs (113 kg).
- ▶ When a 36" (914) oven is installed below a cooktop, it is recommended that an additional 3" (76) be added to the cabinet base to ease the use of controls and oven door.
- ▶ When an oven is installed below the cooktop, the gas and electrical conduit should run through the adjacent base cabinet within the shaded area shown in the illustration. The top right area in the oven cavity is available, but will make installation difficult.
- ▶ When a gas cooktop is installed above cabinets, the gas and electrical placement is not critical. A grounded outlet needs to be placed within 4' (1.2 m) of the right rear of the cooktop.
- ▶ The Wolf 36" (914) gas cooktop requires a separate 120V, 60 Hz power supply. The service should have its own 15 amp circuit breaker and a grounded 3-prong receptacle should be located within the reach of the 6' (1.8 m) power cord.
- ▶ You must follow all National Electrical Code and gas regulations. In addition, be aware of local codes and ordinances when installing your services.
- ▶ Wolf gas cooktops are designed to operate on natural gas at 5" (127) WC (water column) pressure or LP gas at 10" (254) WC pressure. They are supplied with a 1/2" NPT male gas connection at the right rear corner on the bottom of the cooktop. The male connector exits the unit straight down and you are supplied with a regulator with two female connectors.
- ▶ Wolf gas cooktops using natural gas function up to an altitude of 8,000' (2438 m) without any adjustment. Natural gas installations from 8,000' (2438 m) to 10,000' (3048 m) need the high altitude conversion kit. LP gas installations will operate up to 10,000' (3048 m) without adjustment.
- ▶ A Wolf ventilation system is recommended. When installing a ventilation hood, refer to the specific requirements of the hood for the minimum dimension to cooking surface.

▶ *Dimensions in parentheses are in millimeters unless otherwise specified.*